

FX 12/4 GH



stage **5V**

Front Panel




29 lt Fuel tank



Lifting eye



Unit of measure: mm

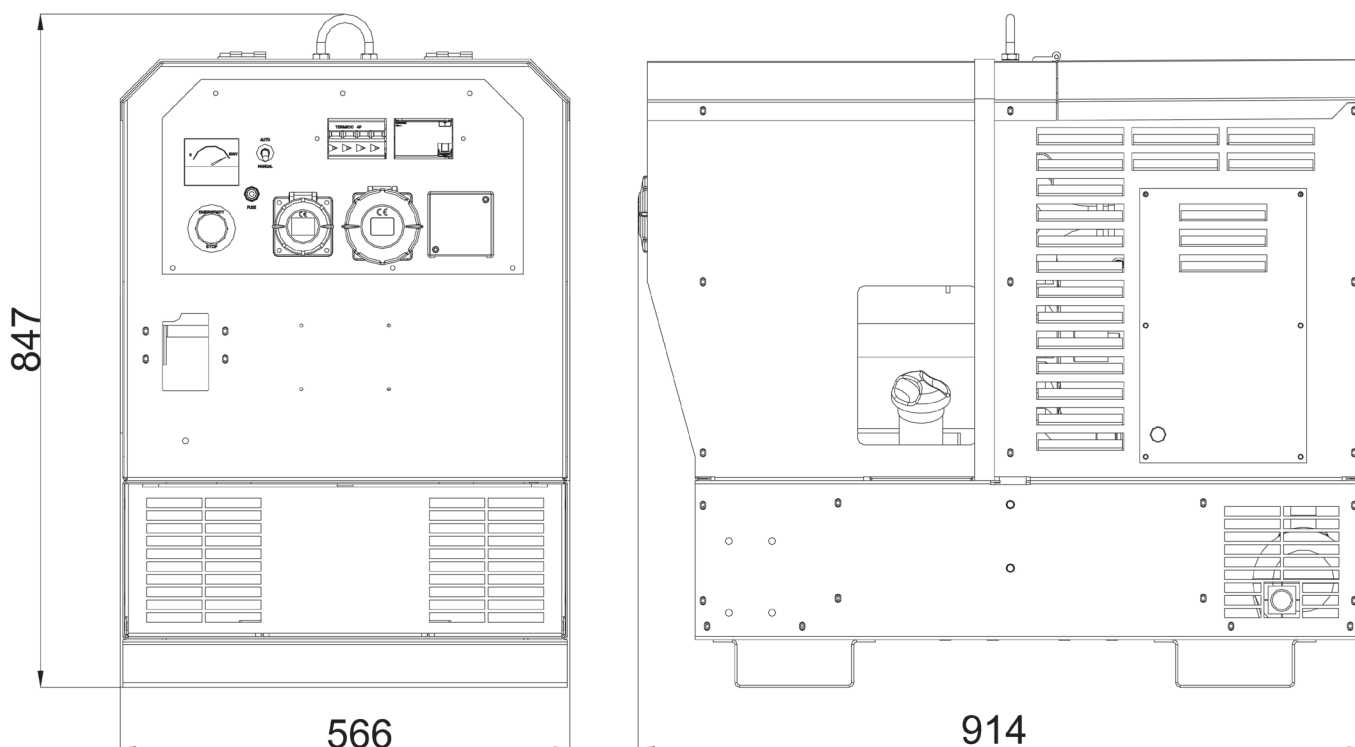

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com

mase
GENERATORS
Believing in change.

Description

- Portable power generator
- Petrol engine 3000 rpm
- Fuel tank 29 lt

Standard Features

- Low oil level cut out device
- 12 V battery
- 1 x 400V - 16A EEC three-phase socket
- 1 x 230V - 16A EEC single-phase socket
- Power output protection
- Earth Leakage Circuit Breaker
- Voltmeter
- Hourmeter
- Automatic voltage regulator (AVR)
- Fitted for AMF-ATS or Remote control operation
- Central lifting eye

Options

- Versions with different voltages
- 60Hz version

Accessories on request

- AMF/ATS panel for auto start operation
- Remote control
- Trolley: two-wheels and handles

Noise level

- Lwa 96 (71 dB a 7 mt)

AC generator - 50Hz

- Type: synchronous
- Three-phase power (stand-by): 11kVA - 400V
- Three-phase power (prime): 10kVA - 400V
- Single-phase power (max.): 4kVA - 230V
- Power Factor: $\cos \phi$ 0,8

**Petrol Engine
3000 rpm**

- Type: Honda GX630 - 2 cyl. - 688 cm³
- Max power: 19,8 hp (14,6 kWm)
- Starting system: electric (12Vdc)
- Cooling system: air
- Fuel consumption @ 75%: 5,5 lt/h

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 m (*)
- Mechanical Protection: IP 23
- Fuel tank capacity: 29 lt
- Dimensions (L x W x H): 914 x 566 x 847 mm
- Dry weight: 194 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.