

# PD 10/8 SS-K



**mase**  
**GENERATORS**  
Believing in change.



Instrument panel





Rapid access



Lifting eye



Unit of measure: mm

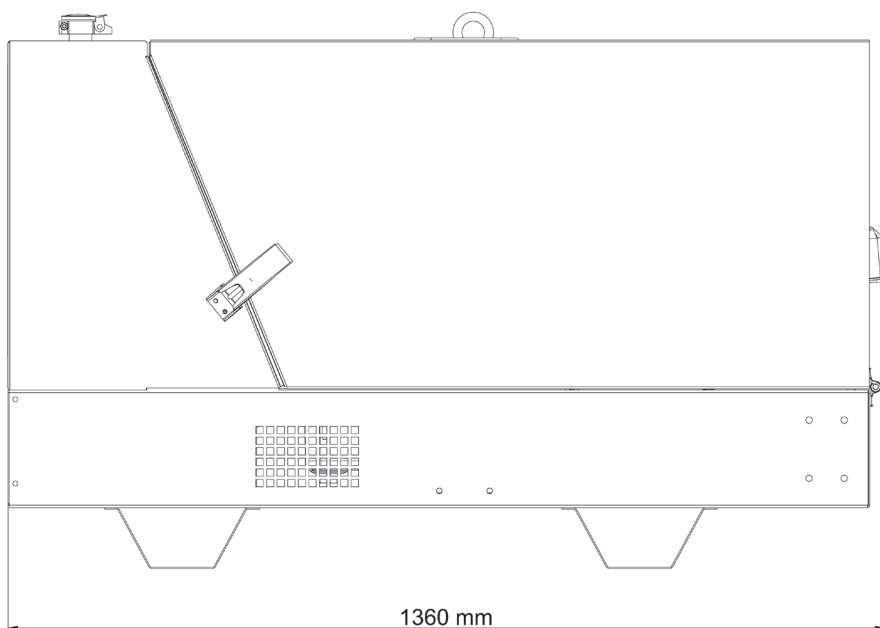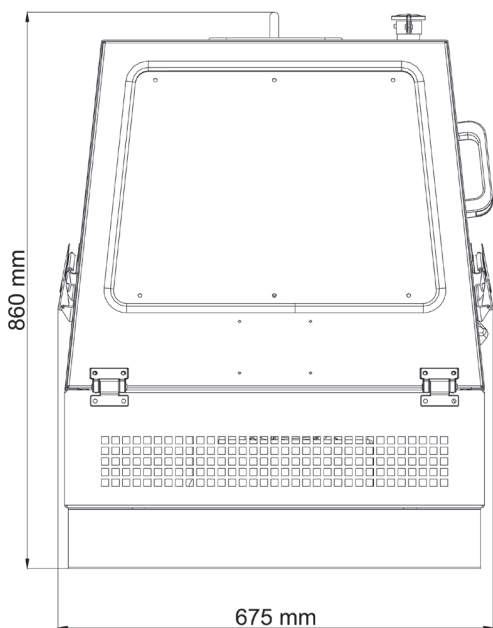

We reserve the right to change data, images and drawings without notice.  
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa  
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311  
www.masegenerators.com - commercial@masegenerators.com

**mase**  
**GENERATORS**  
Believing in change.



**Output power 10 kVA three-phase**  
**Output power 6,6 kVA single-phase**

**Description**

- Super silenced power generator
- Diesel engine 3000 rpm
- Fuel tank 30 lt

**Standard Features**

- 12 V battery
- 1 x 400V - 16A three-phase EEC socket
- 1 x 230V - 32A single-phase EEC socket
- 1 x 230V - 16A single-phase EEC socket
- Thermal protection
- Earth leakage circuit breaker
- Emergency stop button
- Reinforced single-phase output power selector
- Voltmeter
- Hourmeter
- Central lifting eye
- Foreseen for AMF-ATS or Remote control operation
- Glow plug preheating lamp
- Auto engine protection shutdown system with warning lights for:
  - battery charger failure
  - high water temperature
  - low oil pressure
  - low fuel level

**Options**

- Versions with different voltages
- 60Hz version
- Spark arrester muffler
- Engine heater

**Accessories on request**

- Remote control unit with 20 mt cable
- AMF / ATS panel
- Trolley: two-wheels and handles

**Noise level**

- Lwa 95 (70 dB a 7 mt)

**AC generator - 50Hz**

- Type: synchronous
- Three-phase power (stand-by): 10 kVA - 400 V
- Single-phase power (stand-by): 6,6 kVA - 230 V
- Power Factor:  $\cos \phi$  0,8

**Diesel Engine  
3000 rpm**

- Type: Kubota D 722 - 3 cyl. - 719 cm<sup>3</sup>
- Max power: 19 HP (14 kWm)
- Starting system: electric (12Vdc)
- Cooling system: water
- Fuel tank capacity: 30 lt
- Fuel consumption @ 75%: 3,3 lt/h

**Other features**

- Insulation Class: H
- Ambient temperature: 40 °C (\*)
- Altitude: 1000 mt (\*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 1360 x 675 x 860 mm
- Dry weight: 350 kg

(\*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.