


EA 40 GH




stage **5V**


Honda GX 200 Engine

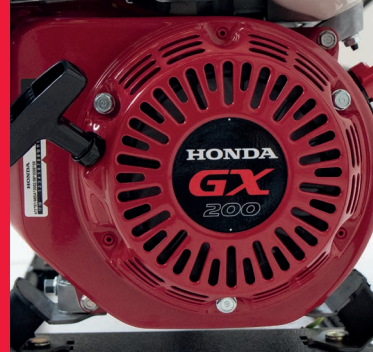



Front Panel

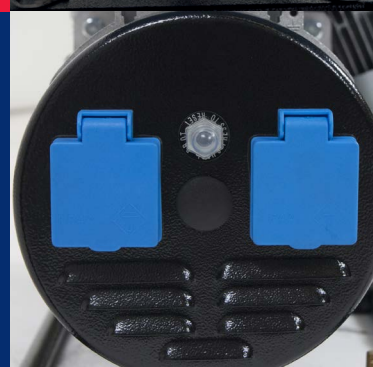

3,1 lt Fuel Tank

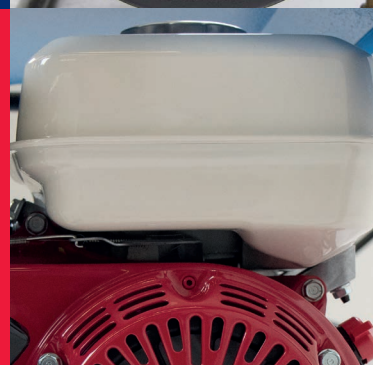

Unit of measure: mm

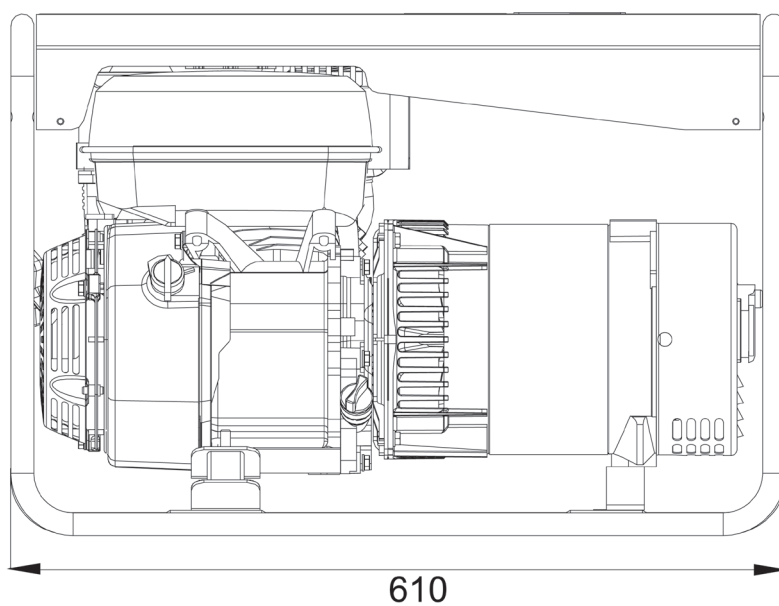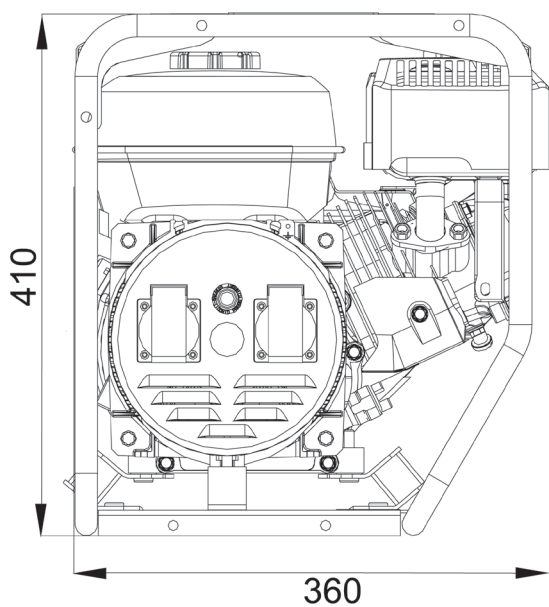

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com

mase
GENERATORS
Believing in change.

Description

- Portable single-phase power generator
- Output power 3,85 kVA
- Petrol engine 3000 rpm
- Fuel tank 3,1 lt

Standard Features

- Low oil level shutdown device
- 2 x 230 V - 50 Hz single-phase Schuko socket
- protected by circuit breaker

Options

- Oversized fuel tank (11 lt)

Noise level

- Lwa 98 (73 dB a 7 mt)

AC generator - 50Hz

- Type: synchronous
- Single-phase power (max.): 3,85 kVA - 230 V
- Power Factor: $\cos \phi$ 0,8

**Petrol Engine
3000 rpm**

- Type: Honda GX 200 OHV - STAGE V - 1 cyl.
5,1 HP (3,8 kWm) 196 cm³
- Cooling system: air
- Starting system: recoil
- Fuel tank capacity: 3,1 lt

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 mt (*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 610 x 360 x 410 mm
- Dry weight: 38 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.