


# EA 80 GH



6,1 lt Fuel Tank

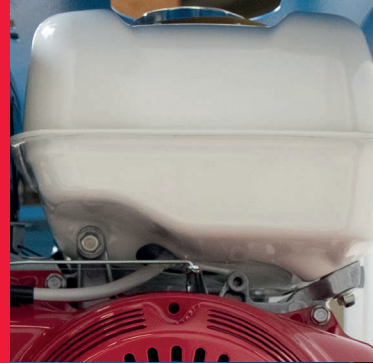



Socket Panel



Honda GX390 Engine



Unit of measure: mm

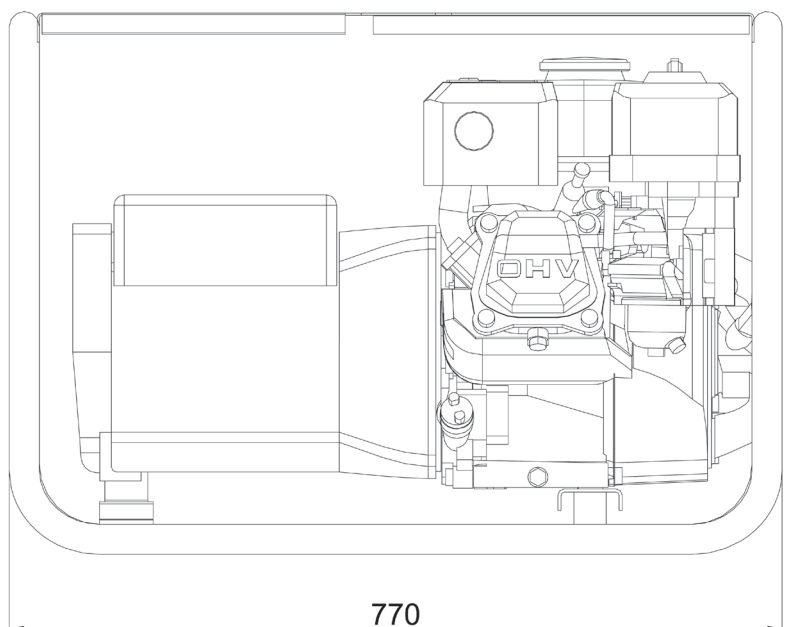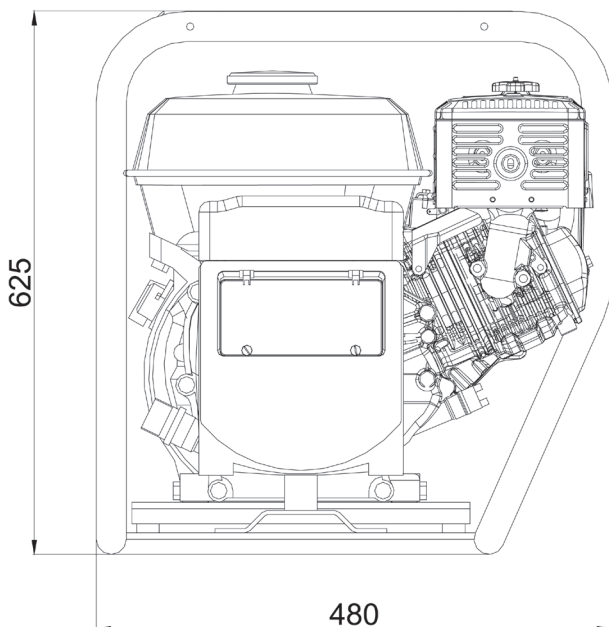

We reserve the right to change data, images and drawings without notice.  
For more information, you may contact your local dealer or Mase Generators S.p.A.

**Mase Generators spa**  
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311  
[www.masegenerators.com](http://www.masegenerators.com) - [commercial@masegenerators.com](mailto:commercial@masegenerators.com)

**mase**  
**GENERATORS**  
*Believing in change.*

**Description**

- Portable single-phase power generator
- Output power 7 kVA
- Petrol engine 3000 rpm
- Fuel tank 6,1 lt

**Standard Features**

- Low oil level shutdown device
- 1 x 32 A, 230 V - 50 Hz single-phase EEC socket
- 1 x 16 A, 230 V - 50 Hz single-phase EEC socket
- 12 Vdc battery charger outlet protected by fuse
- Protections for power outputs
- Earth Leakage Circuit Breaker (ELCB)

**Options**

- Versions with different voltages
- 60Hz version
- Oversized fuel tank (25 lt)
- Automatic voltage regulator (AVR)

**Accessories on request**

- Trolley: two-wheels and handles

**Noise level**

- Lwa 97 (72 dB a 7 mt)

**AC generator - 50Hz**

- Type: synchronous
- Single-phase power (max.): 7 kVA - 230 V
- Battery charger power: 120 W - 12 V - 10 A - DC
- Power Factor:  $\cos \phi$  0,8

**Petrol Engine  
3000 rpm**

- Type: Honda GX 390 OHV - 1 cyl. - STAGE V - 11 HP (8,2 kWm) 390 cm<sup>3</sup>
- Cooling system: air
- Starting system: recoil
- Fuel tank capacity: 6,1 lt
- Fuel consumption @ 75%: 3,3 lt/h

**Other features**

- Insulation Class: H
- Ambient temperature: 40 °C (\*)
- Altitude: 1000 mt (\*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 770 x 480 x 625 mm
- Dry weight: 78 kg

(\*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.