

IS 6.06i



CONTROL PANEL



YANMAR ENGINE



INPUT/OUTPUT FUEL PIPE

the intercooler W/A assures the perfect functioning of the generator independently of the external ambient temperature, therefore the alternator and the engine will work at ideal temperature optimizing the performance and reliability of the gen-set. The generator may be installed in any room on the vessel without the need of ventilation blowers. Extremely compact and quiet, the generator is equipped with a double shock absorbing system to increase comfort: the first one absorbs vibrations from engine-alternator to the frame, the second one absorbs residual micro-vibrations from frame to vessel.

We reserve the right to modify the data, images and drawings in this document without prior notice.

For more detailed information, please contact your local distributor or Mase Generators S.p.A.

Last update date 01/08/2025



WITH INVERTER



EASY
INSTALLATION



SUPER
SILENCED



mase generators spa

Via Tortona, 345 | 47522 - Cesena (FC) | Italy

Tel. +39 0547 354311

commercial@masegenerators.com

www.masegenerators.com

mase
GENERATORS
Believing in change.

CONTROL PANEL

_ The CBU module is equipped with a large display and includes multiple functions for the complete monitoring of the generator:

- Manual start
 - Voltage Vac
 - Frequency Hz
 - Engine rpm
 - Hour meter
 - Genset battery voltage
 - Oil low pressure alarm
 - Engine high temperature alarm
 - Alternator high temperature alarm
 - Alarm history
 - Maintenance warnings and 10 meters connection cable
- _ Emergency stop button
- _ Thermal protection


ENGINE

- _ Easy maintenance access to the feeding and lubrication systems, the sea water pump and the air filter
- _ Double vibration dumping system
- _ Oil drain pump

SOUNDPROOF CABIN

- _ Made of extremely light marine aluminum with very high resistance to external agents

Insulated poles kit (for metal hull boats), dry exhaust kit and keel cooling kit are available on request

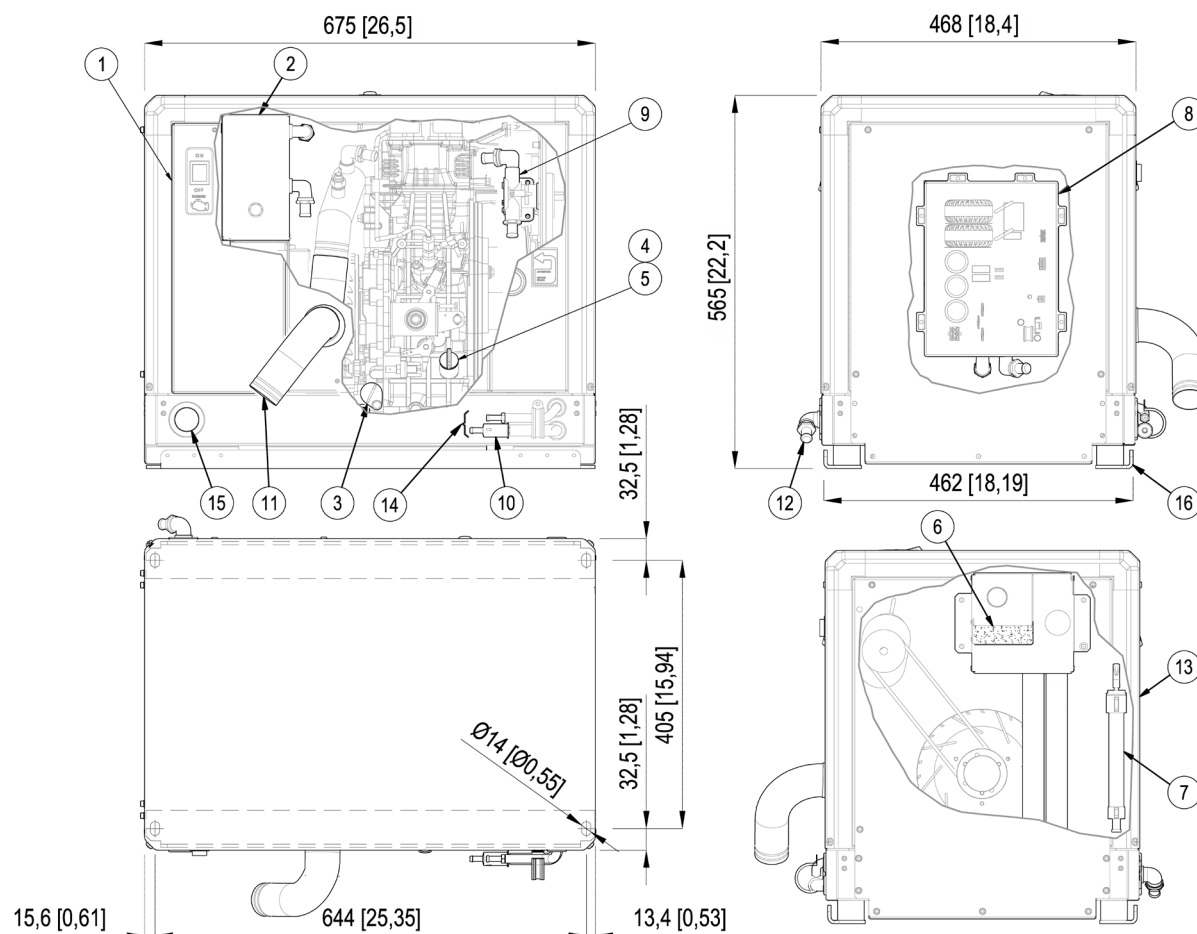

- | | | | |
|--------------------------|-------------------|-------------------------|----------------------------|
| 1. Control panel | 6. Air filter | 11. Exhaust manifold | 16. Fuel tank connections |
| 2. Air / water exchanger | 7. Oil drump pump | 12. (d.60 mm) | (d.8 mm) |
| 3. Oil filter cartridge | 8. Inverter | 13. Sea water intake | 17. Cables outlet |
| 4. Oil dipstick | 9. Sea water pump | 14. (d.16 mm) | 18. Genset fixing brackets |
| 5. Engine oil filler | 10. Fuel filter | 15. Battery connections | |

DATA SHEET

AC alternator -	Permanent magnets (PMG)
Cooling -	Air / Water (Intercooler W / A)
Voltage -	115 to 240 V
Frequency -	60 Hz
Amps -	52.2 to 25 A
Max power -	6 kW
Continuous power -	4.3 kW
Power Factor -	cos ø 1
Insulating class -	H
Voltage stability -	±1%
Frequency stability -	±1%

The power is referred to a sea water temperature up to 31°, an atmospheric pressure of 100 KPa and a humidity percentage of 30%

Model -	Yanmar L100V
Type -	Diesel 4 stroke
Cylinders -	nr 1
Cylinder block material -	Aluminium
Bore -	86 mm - 3.39 in
Stroke -	75 mm - 2.96 in
Displacement -	435 cc - 26.5 CID
Power -	8.8 hp - 6.47 kWm (at 3300 RPM)
RPM -	3100
Compression ratio -	20.5:1
Combustion system -	Direct injection
Engine head material -	Aluminium
Speed governor -	Centrifugal mechanical
Lubrication system -	Forced
Oil sump capacity with filter -	1.65 l - 0.46 gl
Engine stop system -	Solenoid valve
Fuel pump -	Electric
Max. fuel pump head -	700 mm - 27.5 in
Fuel consumption -	1.65 l/min - 0.44 gl/min
Air intake -	600 l/min - 21 cfm
Starting battery -	55 Ah - 12 V
Battery charger -	10 Ah - 12 V
Starter motor -	0.8 kW - 12 V
Max. inclination -	25°
Water pump flow -	20 l/min - 5.3 gl/min
Sea water inlet pipe Ø -	16 mm - 5/8"
Exhaust pipe Ø -	60 mm - 2.5 in
Input/Output fuel pipe Ø -	8 mm - 5/16"

Dimensions (L x W x H) -

675 x 468 x 565 mm - 26.5 x 18.4 x 22.2 in (with soundproof box)

Weight -

130 Kg - 287 lb (with soundproof box)

Noise Level -

56 dBA at 7 mt (23 ft)

Accessory

Code

ACCESSORIES ON REQUEST

• Filtering kit: sea water inlet, sea water strainer, taps, fittings D.16 - ref.2	04349
• Siphon break D.1 - ref.1	04290
• Vetus LP60 muffler	71711
• Vetus silencer MP60	71746
• Silencer c.71746 with soundproofing sponge	039865
• Vetus Separator LGS6050	71712
• Centek muffler 2" 1/2	71714
• Centek 2" 1/2 water/gas exhaust separator	71713
• Soundproofing cabin	040705
• Remote START/STOP 20-meter control kit for CBU (3000 RPM)	041238
• Cruise KIT	913827

