


PD 10000 SKL





Warning Lights

Emergency Stop

40 lt Fuel Tank

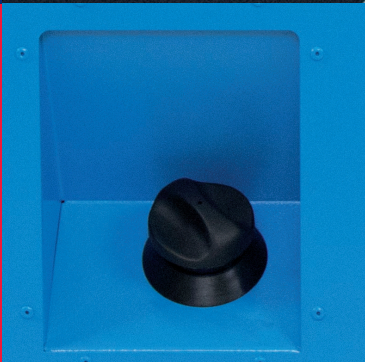

Unit of measure: mm

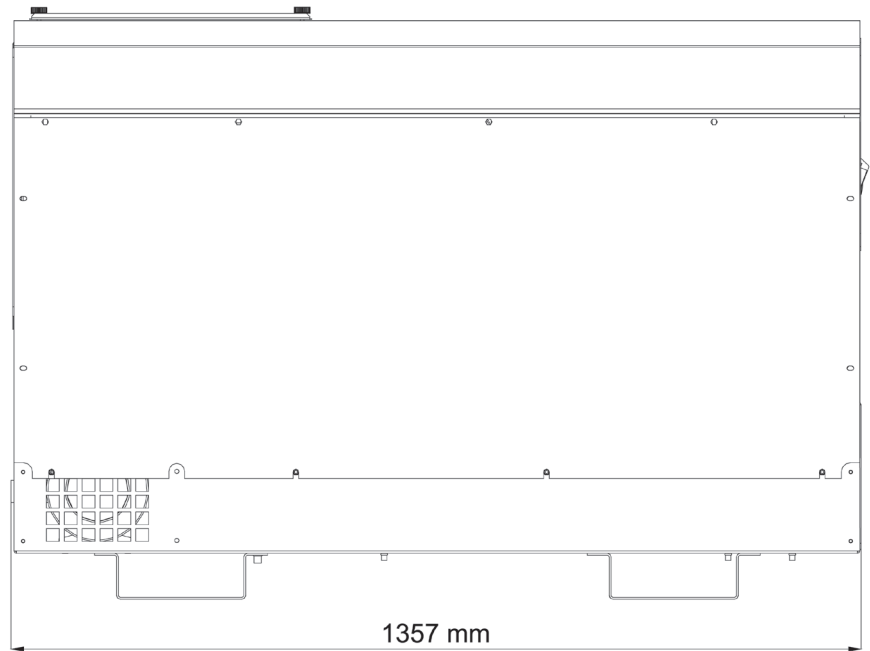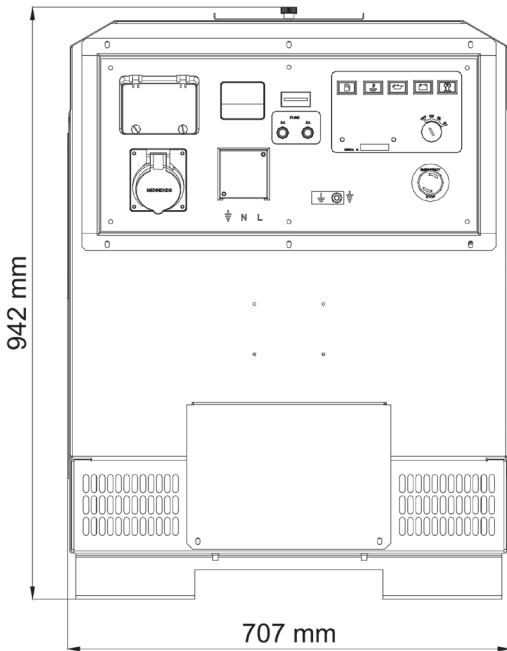

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com

mase
GENERATORS
Believing in change.



**Max. Output power 10 kVA
single-phase**

Description

- Silenced power generator
- Output power 10 kVA single-phase
- Diesel engine 1500 rpm
- Fuel tank 40 lt

Standard Features

- Auto engine protection shutdown system with warning lights for:
 - battery charger failure
 - high water temperature
 - low fuel level
 - low oil pressure
- 1 x 230V - 32A EEC single-phase socket
- 1 x 230V single-phase output
- 12 V built-in battery
- Power output protection
- Earth Leakage Circuit Breaker
- Voltmeter
- Hourmeter
- Emergency stop button
- Fork-lift pockets
- Fitted for AMF-ATS or Remote control operation

Options

- Versions with different voltages
- 60Hz version

Accessories on request

- AMF/ATS panel
- Remote Start/Stop kit with cable (20 mt)
- Trolley: two wheels and handles

Noise level

- Lwa 95 (70 dB at 7 mt)

AC generator - 50Hz

- Type: synchronous
- Single-phase power (stand-by): 10kVA - 230V
- Single-phase power (prime): 9kVA - 230V
- Power Factor: $\cos \phi$ 0,8

**Diesel Engine
1500 rpm**

- Type: Kubota D1105 - 3 cyl. - 1123 cm³
- Max power: 12,7 hp (9,5 kWm)
- Starting system: electric (12Vdc)
- Cooling system: water
- Fuel consumption @ 75%: 2 lt/h

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 m (*)
- Mechanical Protection: IP 23
- Fuel tank capacity: 40 lt
- Dimensions (L x W x H): 1357 x 707 x 942 mm
- Dry weight: 350 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.