

VOYAGER 6020 DM




Control panel

3000 rpm Kubota engine

Fuel inlet and outlet



Unit of measure: mm

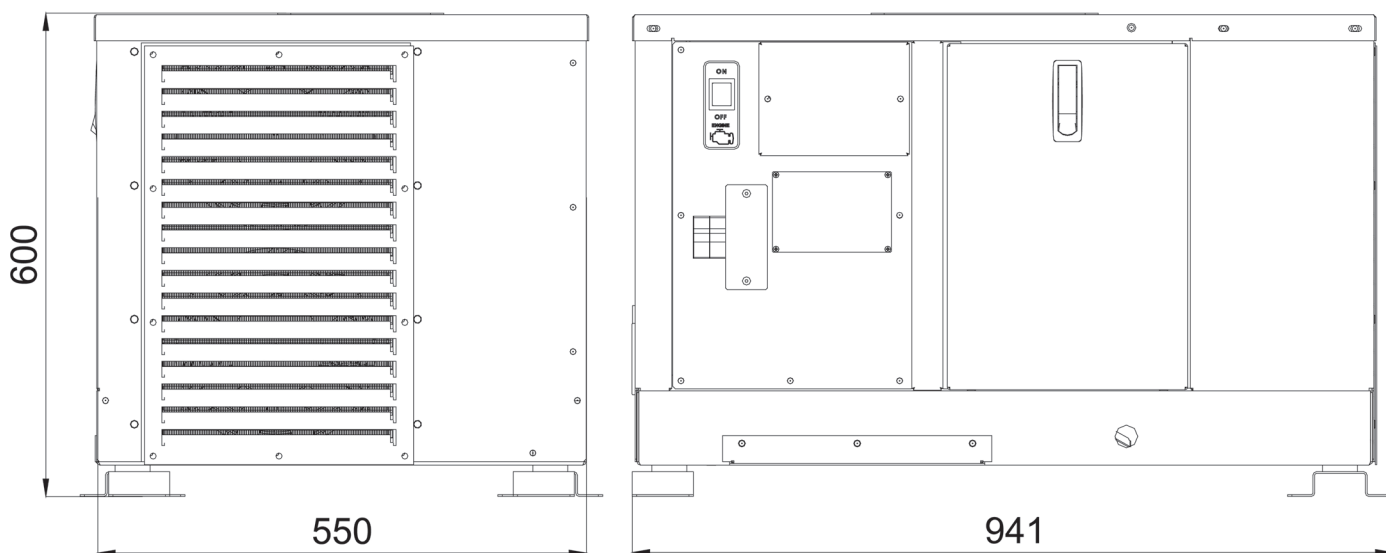

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com





Output power 7,5 kVA single-phase

Description

- Vehicular power generator
- Diesel engine 3000 rpm
- Super silenced model

Standard Features

- Remote control panel with: multifunction display showing single-phase generator voltage, battery voltage, frequency, hour meter, rpm
- Start / Stop button
- Connection cable to remote panel
- Safety shutdown in case of: low oil level, high water temperature
- Engine failure warning lights
- Hourmeter
- Faults memory
- Circuit breaker for the generator protection
- General shutdown switch
- Emergency stop switch
- Built-in muffler

Options

- 20 Lt plastic fuel tank with brackets
- 20 Lt steel fuel tank with brackets
- Fuel reserve indicator kit
- Fuel filler with key lock cap
- 1 mt fuel pipe for connection tank-fuel filler
- Fuel pipe I/O to the automatic tank

Noise level

- Lwa 87 (62 dB a 7 mt)

AC generator - 50Hz

- Type: synchronous
- Single-phase power (max.): 7,5 kVA - 230V
- Power Factor: $\cos \phi$ 0,8

Diesel Engine 3000 rpm

- Type: Kubota Z482 - 2 cyl. - 11,1 hp (8,3 kWm) - 479 cm³
- Cooling system: water
- Starting system: electric
- Fuel consumption @ 75%: 2,6 lt/h

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 mt (*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 941 x 550 x 600 mm
- Dry weight: 190 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.