

VS 12.5 - VS 12.6



CONTROL PANEL



KUBOTA ENGINE



INPUT/OUTPUT FUEL PIPE

the engine revs vary depending on the required load; therefore, if you have only few electrical applications connected, the genset will automatically calibrate to the required power, while ensuring exceptional voltage and frequency stability. That means lower fuel consumption, reduction of emissions, lower need of maintenance and more silent operation. Extremely compact and quiet, the genset is equipped with a double shock absorbing system to increase comfort: the first one absorbs vibrations from engine-alternator to the frame, the second one absorbs residual micro-vibrations from frame to vessel.



COMPACT
DESIGN



EASY
INSTALLATION



SUPER
SILENCED

We reserve the right to modify the data, images and drawings in this document without prior notice.

For more detailed information, please contact your local distributor or Mase Generators S.p.A.

Last update date 01/08/2025



mase generators spa

Via Tortona, 345 | 47522 - Cesena (FC) | Italy

Tel. +39 0547 354311

commercial@masegenerators.com

www.masegenerators.com

mase
GENERATORS
Believing in change.

Output power 12.5 kW single-phase

CONTROL PANEL

_ CBU EVO IL4 device controls and drives the genset. The large display and control pushbuttons allow an easy use and monitoring:

- Manual start
- Voltage Vac
- Frequency Hz
- Engine rpm
- Hour meter
- Genset battery voltage
- Oil low pressure alarm
- Engine preheating
- Engine high temperature alarm
- Alarm history
- Maintenance warnings

_ Emergency stop button

_ Protection against short circuit and overload

ENGINE

_ Easy maintenance access to the feeding and lubrication systems, the sea water pump and the air filter


_ Double vibration dumping system

_ Oil drain pump

SOUNDPROOF CABIN

_ Made of extremely light marine aluminum with very high resistance to external agents

Insulated poles kit (for metal hull boats), dry exhaust kit and keel cooling kit are available on request

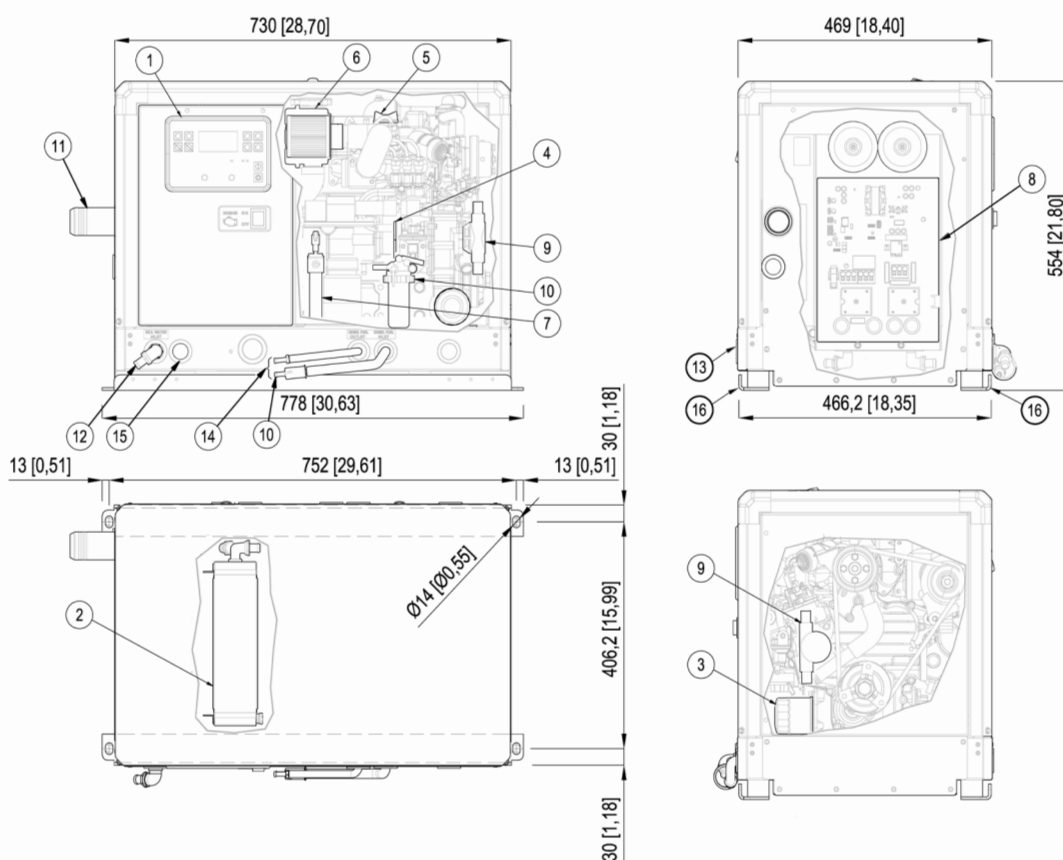

- | | | | |
|--------------------------|-------------------|--------------------------------|------------------------------------|
| 1. Control panel | 6. Air filter | 11. Exhaust manifold (d.50 mm) | 14. Fuel tank connections (d.8 mm) |
| 2. Air / water exchanger | 7. Oil drump pump | 12. Sea water intake (d.16 mm) | 15. Cables outlet |
| 3. Oil filter cartridge | 8. Inverter | 13. Battery connections | 16. Genset fixing brackets |
| 4. Oil dipstick | 9. Sea water pump | | |
| 5. Engine oil filler | 10. Fuel filter | | |

VS 12.5 - VS 12.6

mase
GENERATORS
Believing in change.

Output power 12.5 kW single-phase

50 Hz

60 Hz  

AC alternator -

Permanent magnets (PMG)

Cooling -

Air / Water (Intercooler W / A)

Voltage -

230 to 240 V

115 to 240 V

Frequency -

50/60 Hz

Amps -

54.3 to 52.1 A

108.7 to 52.1 A

Continuous power -

12.5 kW

Power Factor -

cos ø 1

Insulating class -

H

Voltage stability -

±1%

Frequency stability -

±1%

The power is referred to a sea water temperature up to 31°, an atmospheric pressure of 100 KPa and a humidity percentage of 30%

Model -

KUBOTA D902

Type -

Diesel 4 stroke

Cylinders -

nr 3

Cylinder block material -

Cast iron

Bore -

72 mm - 2.84 in

Stroke -

73.6 mm - 2.90 in

Displacement -

898 cc - 54.80 CID

Power -

18 hp - 13.24 kWm (at 3150 RPM)

RPM -

2150 - 3150

Compression ratio -

24:1

Combustion system -

Indirect injection

Engine head material -

Cast iron

Speed governor -

Electronic with actuator

Lubrication system -

Forced

Oil sump capacity with filter -

3.8 l - 1.07 gl

Engine stop system -

Solenoid

Fuel pump -

Electric

Max. fuel pump head -

700 mm - 27.5 in

Fuel consumption -

4.7 l/h - 1.24 gl/h

Starting battery -

65 Ah - 12 V

Battery charger -

30 Ah - 12 V

Starter motor -

1.2 kW - 12 V

Max. inclination -

25°

Water pump flow -

22 l/min - 5.8 gl/min

Sea water inlet pipe Ø -

16 mm - 5/8"

Exhaust pipe Ø -

50 mm - 2"

Input/Output fuel pipe Ø -

8 mm - 5/16"

Dimensions (L x W x H) -

730 x 469 x 554 mm - 28.70 x 18.40 x 21.80 in (with soundproof box)

Weight -

185 Kg - 408 lb

192 Kg - 423 lb

(with soundproof box)

Noise Level -

55 dBA at 7 mt (23 ft)

Accessory

Code

**ACCESSORIES
ON REQUEST**

• Installation kit D.50: filtering set, exhaust set and siphon break D.16	012276
• Filtering kit: sea water inlet, sea water strainer, taps, fittings D.16 - ref.5	04349
• Exhaust kit: sea water lock, silencer, outlet D.50 - ref.3	04658
• Super silenced exhaust kit & exhaust gas separator D.50 - ref.6	010078
• Siphon break D.16 - ref.4	04290
• Muffler D.50	70795
• Silencer D.50	71809
• Water/gas exhaust separator D.50	04488
• Vetus LP50 muffler	71148
• Vetus silencer MP50	71751
• Silencer Vetus c.71751 with soundproofing sponge	039866
• Vetus Separator LGS5038	71717
• Centek muffler 2"	71155
• Centek 2" water/gas exhaust separator	71156
• Water protection	040539
• Parallel cable	036625
• Soundproofing cabin	038032
• Remote control panel START/STOP with 20 mt cable for Comap IL4 - ref.1	037561
• Remote control panel for Comap IL4 with 20mt cable - ref.2	039607
• Cruise KIT	913652



.1




.2



.3



.4

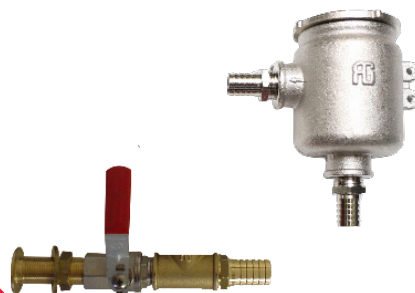

.5



.6