



H/A SERIES

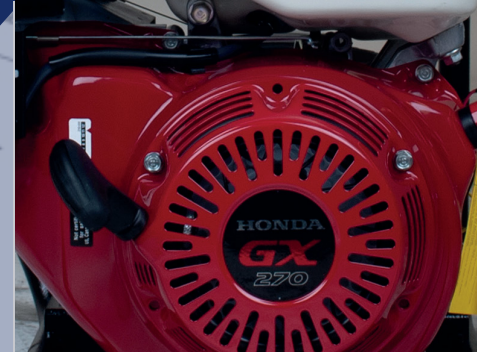

HONDA ENGINE

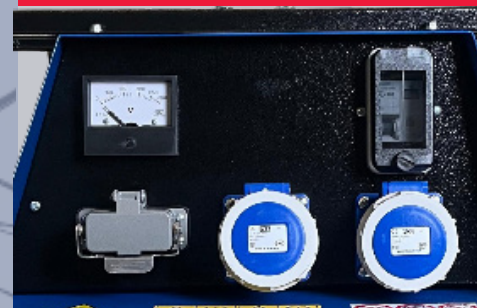

CONTROL PANEL



LIFTING HOOK

H/A series is equipped with 3000 RPM Honda engine compliant to 2016/1628 EU Rule (Stage V); fitted for Automatic Panel Control by connector. Central lifting hook on the frame for a functional and easy handling.

We reserve the right to modify the data, images and drawings in this document without prior notice. For more detailed information, please contact your local distributor or Mase Generators S.p.A.



COMPACT



VERSATILE



STAGE V



mase generators spa

Via Tortona, 345 | 47522 - Cesena (FC) | Italy

Tel. +39 0547 354311

commercial@masegenerators.com

www.masegenerators.com

mase
GENERATORS
Believing in change.

MG 50 H/A

- Low oil level shutdown device
- 2 x 16 A - 230 V - IP 67 single-phase sockets
- Starting battery
- Voltmeter
- Earth Leakage Circuit Breaker (ELCB)
- Connector for AMF-ATS panel and remote control
- Lifting hook


MG 80 H/A

- Low oil level shutdown device
- 1 x 16 A - 230 V - IP 67 single-phase socket
- 1 x 32 A - 230 V - IP 67 single-phase socket
- Starting battery
- Voltmeter
- Earth Leakage Circuit Breaker (ELCB)
- Power outputs protections
- Connector for AMF-ATS panel and remote control
- Automatic voltage regulator (AVR)
- Lifting hook


MG 7.5 H/A

- Low oil level shutdown device
- 1 x 16 A - 400 V - IP 67 three-phase socket
- 1 x 16 A - 230 V - IP 67 single-phase socket
- Starting battery
- Voltmeter
- Earth Leakage Circuit Breaker (ELCB)
- Power outputs protections
- Connector for AMF-ATS panel and remote control
- Automatic voltage regulator (AVR)
- Lifting hook

DIMENSIONS IN MM

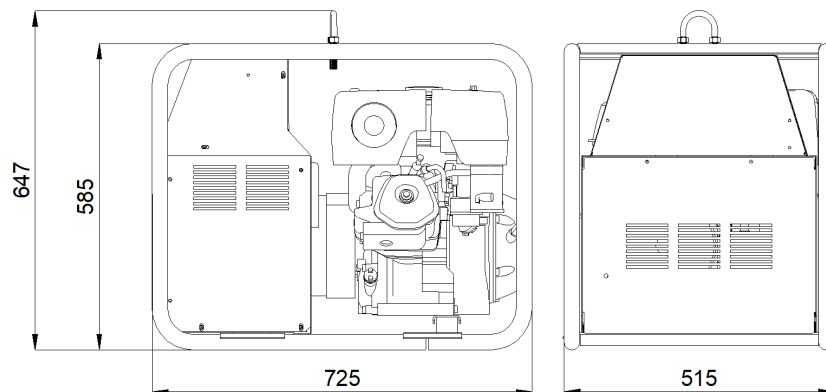

WITH TROLLEY

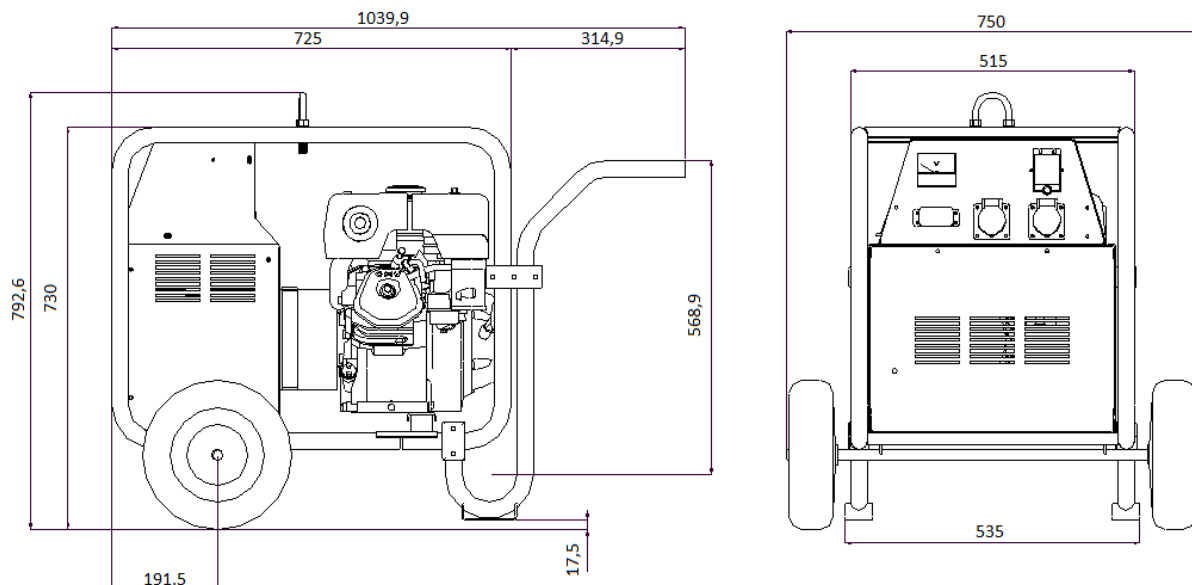



TECHNICAL DATA

	FX 50 H/A	FX 80 H/A	FX 7.5 H/A
Noise level Lwa	99 (74 dB a 7 mt)		
AC generator-50Hz	Synchronous		
Three-phase max. power			7 kVA - 400 V
Single-phase max. power	4,5 kVA - 230 V	7 kVA - 230 V	2,5 kVA - 230 V
Power Factor	cos ø 0,8		
Honda 3000 RPM engine	GX 270 OHV	GX 390 OHV	
Fuel	Petrol		
No. cylinders			
Power	8,2 HP (6,1 kWm)	11 HP (8,2 kWm)	11 HP (8,2 kWm)
Displacement	270 cm3	390 cm3	
Cooling system	Air		
Starting system	Electric		
Fuel tank capacity	5,3 lt	6,1 lt	
Fuel consumption @75%	2,2 lt/h	3,3 lt/h	
Insulation Class	H		
Ambient temperature	40 °C		
Altitude	1000 mt		
Degree of protection	IP 23		
Dimensions (LxWxH)	1430x690x930 mm		
Dry weight	78 kg	93 kg	95 kg



CUSTOMIZATIONS

OPTIONS ON REQUEST

- Automatic voltage regulator (AVR)*

ACCESSORIES

- 1- AMF-ATS automatic starting panel
- 2- Remote control
- 3- Automatic start panel MPnano2
- Two wheels trolley with handles

*Standard for FX 80 H/A and FX 7.5 H/A models



.1



.2



.3



mase generators spa

Via Tortona, 345 | 47522 - Cesena (FC) | Italy

Tel. +39 0547 354311

commercial@masegenerators.com

www.masegenerators.com