


# IS 6.05i



ON/OFF BUTTON

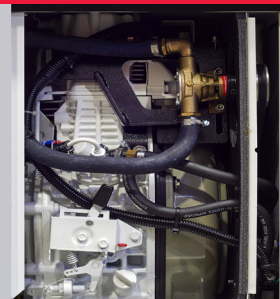

YANMAR ENGINE



INPUT/OUTPUT FUEL PIPE

**the** intercooler W/A assures the perfect functioning of the generator independently of the external ambient temperature, therefore the alternator and the engine will work at ideal temperature optimizing the performance and reliability of the gen-set.

The generator may be installed in any room on the vessel without the need of ventilation blowers.

Extremely compact and quiet, the generator is equipped with a double shock absorbing system to increase comfort: the first one absorbs vibrations from engine-alternator to the frame, the second one absorbs residual micro-vibrations from frame to vessel.



COMPACT DESIGN



EASY INSTALLATION



SUPER SILENCED



MANUFACTURERS

We reserve the right to modify the data, images and drawings in this document without prior notice.

For more detailed information, please contact your local distributor or Mase Generators S.p.A.



**mase generators spa**

Via Tortona, 345 | 47522 - Cesena (FC) | Italy

Tel. +39 0547 354311

commercial@masegenerators.com

www.masegenerators.com

**mase**  
**GENERATORS**  
*Believing in change.*



## Output power 6 kW

### CONTROL PANEL

\_ The CBU module is equipped with a large display and includes multiple functions for the complete monitoring of the generator:

- Manual start
- Voltage Vac
- Frequency Hz
- Engine rpm
- Hour meter
- Genset battery voltage
- Oil low pressure alarm
- Engine high temperature alarm
- Alternator high temperature alarm
- Alarm history
- Maintenance warnings and 10 meters connection cable

\_ Emergency stop button

\_ Thermal protection

### ENGINE

\_ Easy maintenance access to the feeding and lubrication systems, the sea water pump and the air filter


\_ Double vibration dumping system

\_ Oil drain pump

### SOUNDPROOF CABIN

\_ Made of extremely light marine aluminum with very high resistance to external agents

Insulated poles kit (for metal hull boats), dry exhaust kit and keel cooling kit are available on request

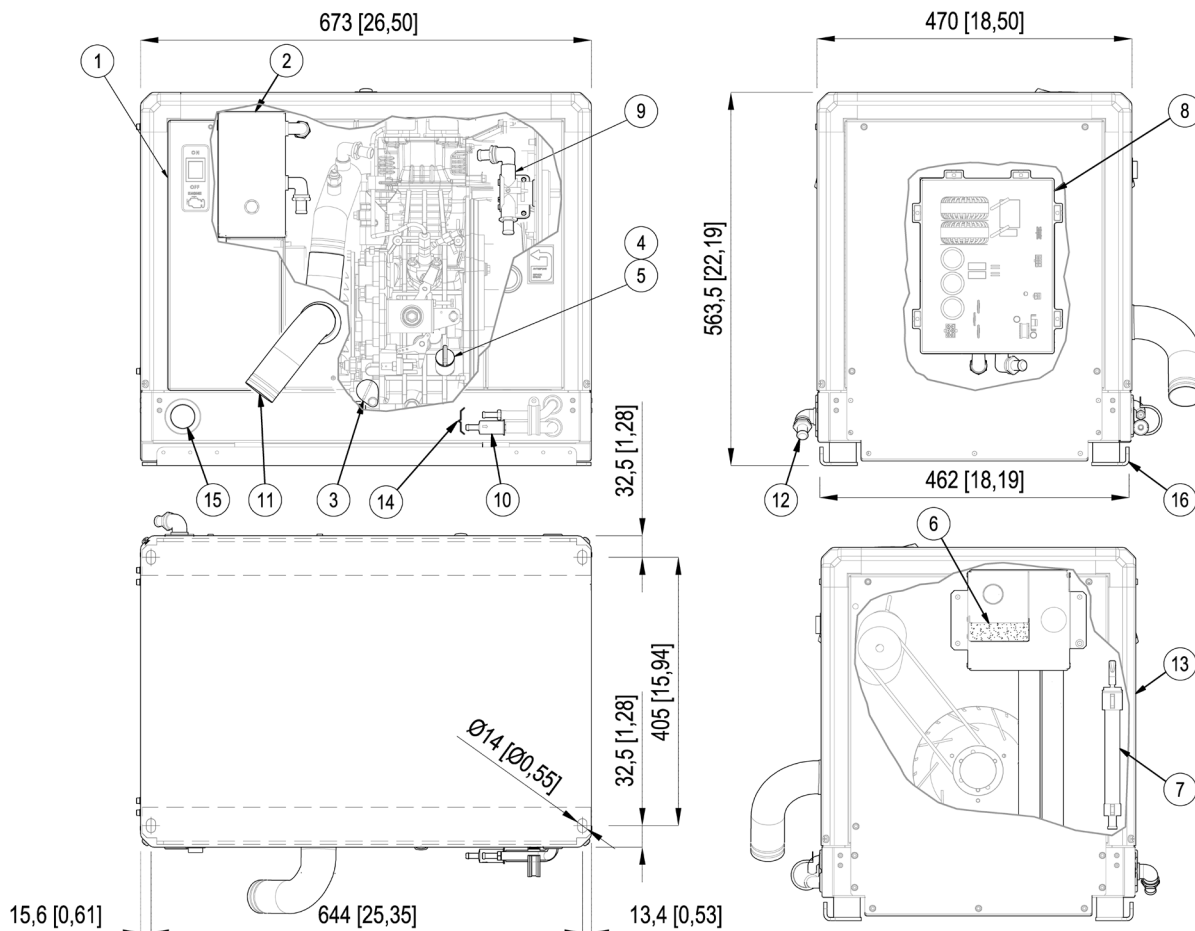

- |                          |                           |                                |                                    |
|--------------------------|---------------------------|--------------------------------|------------------------------------|
| 1. Control panel         | 6. Air filter             | 11. Exhaust manifold (d.50 mm) | 14. Fuel tank connections (d.8 mm) |
| 2. Air / water exchanger | 7. Genset fixing brackets | 12. Sea water intake (d.15 mm) | 15. Cables outlet                  |
| 3. Oil filter cartridge  | 8. Inverter               | 13. Battery connections        | 16. Genset fixing brackets         |
| 4. Oil dipstick          | 9. Sea water pump         |                                |                                    |
| 5. Engine oil filler     | 10. Fuel filter           |                                |                                    |



Output power 6 kW

## DATA SHEET

AC alternator -	Permanent magnets (PMG)
Cooling -	Air / Water (Intercooler W / A)
Voltage -	230 V
Frequency -	50 Hz
Amps -	22.17 A
Max. Power -	6 kW
Continuous power -	5.1 kW
Power Factor -	cos $\phi$ 1
Insulating class -	H
Voltage stability -	$\pm 1\%$
Frequency stability -	$\pm 1\%$

The power is referred to a sea water temperature up to 31°, an atmospheric pressure of 100 KPa and a humidity percentage of 30%

Model -	Yanmar L100N
Type -	Diesel 4 stroke
Cylinders -	nr 1
Cylinder block material -	Aluminium
Bore -	86 mm - 3.38 in
Stroke -	75 mm - 2.95 in
Displacement -	435 cc - 26.5 CID
Power -	8.8 hp - 6.5 kWm
RPM -	3200
Compression ratio -	20:1
Combustion system -	Direct injection
Engine head material -	Aluminium
Speed governor -	Centrifugal mechanical
Lubrication system -	Forced
Oil sump capacity with filter -	1.65 l - 0.36 gl
Engine stop system -	Solenoid valve
Fuel pump -	Electric
Max. fuel pump head -	70 cm - 2.3 ft
Fuel consumption	1.65 l/h - 0.43 gl/h
Air intake-	600 l/min - 158.5 gl/min
Starting battery -	45 Ah - 12 V
Battery charger -	10 Ah - 12 V
Starter motor -	0.8 kW - 12 V
Max. inclination -	30°
Water pump flow -	20 l/min - 5.3 gl/min
Sea water inlet pipe $\varnothing$ -	15 mm - 1/2"
Exhaust pipe $\varnothing$ -	50 mm - 2"
Input/Output fuel pipe $\varnothing$ -	8 mm - 5/16"

Dimensions (L x W x H) - 673 x 470 x 563.5 mm - 26.50 x 18.50 x 22.19 in (with soundproof box)

Weight - 130 Kg - 285 lb (with soundproof box)

Noise Level - 56 dBA at 7 mt (23 ft)



Output power 6 kW

## Accessory

## Code

### ACCESSORIES ON REQUEST

1. Mase exhaust kit: sea water lock, silencer, outlet D.50	04658
2. Siphon break D.16	04290
3. Filtering kit: sea water inlet, sea water strainer, taps, fittings D.16	04349
4. Mase Super silenced exhaust kit & exhaust gas separator D.50	010078
5. Water protection kit	040538
• Mase D.50 muffler	70795
• Mase silencer D.50	71809
• Mase exhaust gas separator	04488

