

# VOYAGER 5050 DMi




Control panel

Variable speed Kubota engine

Fuel inlet and outlet



Unit of measure: mm

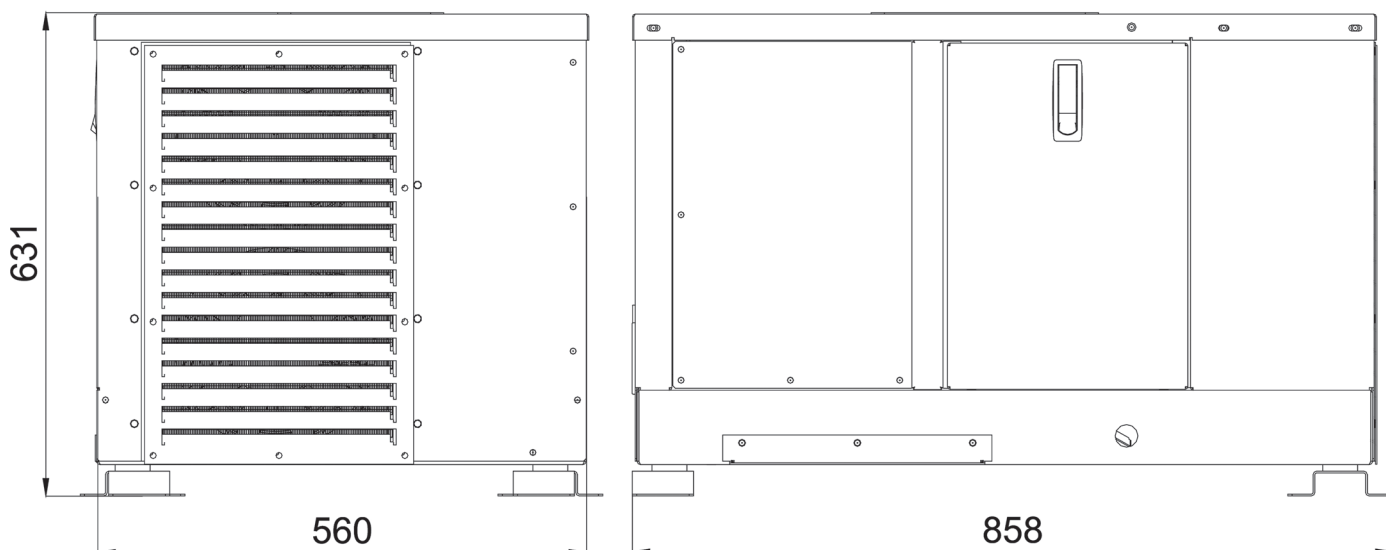

We reserve the right to change data, images and drawings without notice.  
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa  
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311  
www.masegenerators.com - commercial@masegenerators.com





Output power 6,3 kVA single-phase

## Description

- Vehicular power generator
- Super silenced version
- Diesel engine variable speed

## Standard Features

- Remote control panel with 10 mt cable
- Built-in control panel
- Start and stop buttons
- Auto engine protection shutdown system
- Engine failure warning lights
- Operation lamp
- Power output protection
- Faults memory
- Hourmeter
- Emergency stop switch
- Built-in muffler

## Options

- 20 Lt plastic fuel tank with brackets
- 20 Lt steel fuel tank with brackets
- Low fuel indicator kit
- Fuel filler with key lock cap
- 1 mt tank connection pipe with fuel filler
- 2 Mt remote exhaust flexible pipe
- Input/Output fuel pipe to the tank

## Noise level

- Lwa 84 (59 dB a 7 mt)

## AC generator - 50Hz

- Type: PMG
- Single-phase power (max.): 6,3 kVA - 230V
- Power Factor:  $\cos \phi$  0,8

## Diesel Engine variable speed

- Type: Kubota Z482 - 2 cyl. - 11,1 hp (8,2 kWm) - 479 cm<sup>3</sup>
- Cooling system: liquid
- Starting system: electric
- Fuel consumption @ 75%: 1,7 lt/h

## Other features

- Insulation Class: H
- Ambient temperature: 40 °C (\*)
- Altitude: 1000 mt (\*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 858 x 560 x 631 mm
- Dry weight: 200 kg

(\*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.